

# EMBEDDED SMARC 2.1


## conga-SA7



- SMARC 2.1 module based on Intel Atom® x6000E Series and Intel® Pentium® and Celeron® J and N Series processors
- High performance Intel® UHD Graphics for 10th Gen Intel® Processors
- LPDDR4x with up to 4.267 MT/s Memory Support
- Options for Intel® AX210 Wi-Fi 6E/BT
- Options for Industrial Temperature Range -40°C to 85°C

Form Factor	SMARC Specification 2.1					
<b>CPU</b>	Processor	TDP	Cores / Threads	Base Frequency / max. Turbo	Gfx EUs	Intel Use Condition
	J6413	10W	4 / 4	1.8 GHz / 3.0 GHz	16 EU	PC/Client
	J6426	10W	4 / 4	2.0 GHz / 3.0 GHz	32 EU	PC/Client
	x6211E	6W	2 / 2	1.3 GHz / 3.0 GHz	16 EU	Embedded
	x6413E	9W	4 / 4	1.5 GHz / 3.0 GHz	16 EU	Embedded
	x6425E	12W	4 / 4	2.0 GHz / 3.0 GHz	32 EU	Embedded
	x6212RE	6W	2 / 2	1.2 GHz / ---	16 EU	Industrial
	x6414RE	9W	4 / 4	1.5 GHz / ---	16 EU	Industrial
	x6425RE	12W	4 / 4	1.9 GHz / ---	32 EU	Industrial
<b>DRAM</b>	max. 16GB (optional up to 32 GB) onboard LPDDR4x   up to 4.267 MT/s					
<b>Ethernet</b>	2x GbE with TSN support   2x real-time trigger					
<b>I/O Interfaces</b>	2x USB 3.1 Gen2   6x USB 2.0   SATA III   1x SDIO   up to 4x PCIe Gen3   2x I <sup>2</sup> C Bus   SPI   eSPI   4x UART   GPIO   2x CAN   onboard Intel® AX210 Wi-Fi 6E/BT (optional)					
<b>Mass Storage</b>	eMMC 5.1 onboard flash up to 64GB (optional up to 128GB)					
<b>Audio</b>	Intel® High Definition Audio					
<b>Graphics</b>	High performance Intel® UHD Graphics for 10th Gen Intel® Processors					
<b>LVDS</b>	Dual channel LVDS transmitter (support for flat panels with 2x24 bit data mapping up to a resolution of 1920x1200 @60Hz)   shared with eDP (option) or MIPI-DSI x4 (option)					
<b>Digital Display Interface</b>	2x DDI up to 4096x2160 @60Hz					
<b>congatec Board controller</b>	Multistage watchdog   non-volatile user data storage   manufacturing and board Information   board statistics   fast mode and multi-master I <sup>2</sup> C bus   power loss control					
<b>Embedded BIOS Feature</b>	AMI Aptio® UEFI firmware   32 Mbyte serial SPI with congatec Embedded BIOS feature   OEM Logo   OEM CMOS Defaults   LCD Control   Display Auto Detection   Backlight Control   Flash Update					
<b>Power Management</b>	ACPI 5.0 compliant   Smart Battery Management					
<b>Operating Systems</b>	Microsoft® Windows 11 IoT Enterprise   Microsoft® Windows 10   Microsoft® Windows 10 IoT Enterprise   Linux   Yocto					
<b>Hypervisor</b>	RTS Real-Time Hypervisor					
<b>Power Consumption</b>	See manual for full details					
<b>Temperature</b>	Commercial variants:	Operation 0° to +60°C		Storage -20 to +80°C		
	Industrial variants:	Operation -40° to +85°C		Storage -40 to +85°C		
<b>Humidity</b>	Operation:	10% to 90% r. H. non cond.				
	Storage:	5% to 95% r. H. non cond.				
<b>Size</b>	82 x 50 mm					

# conga-SA7 | Block Diagram

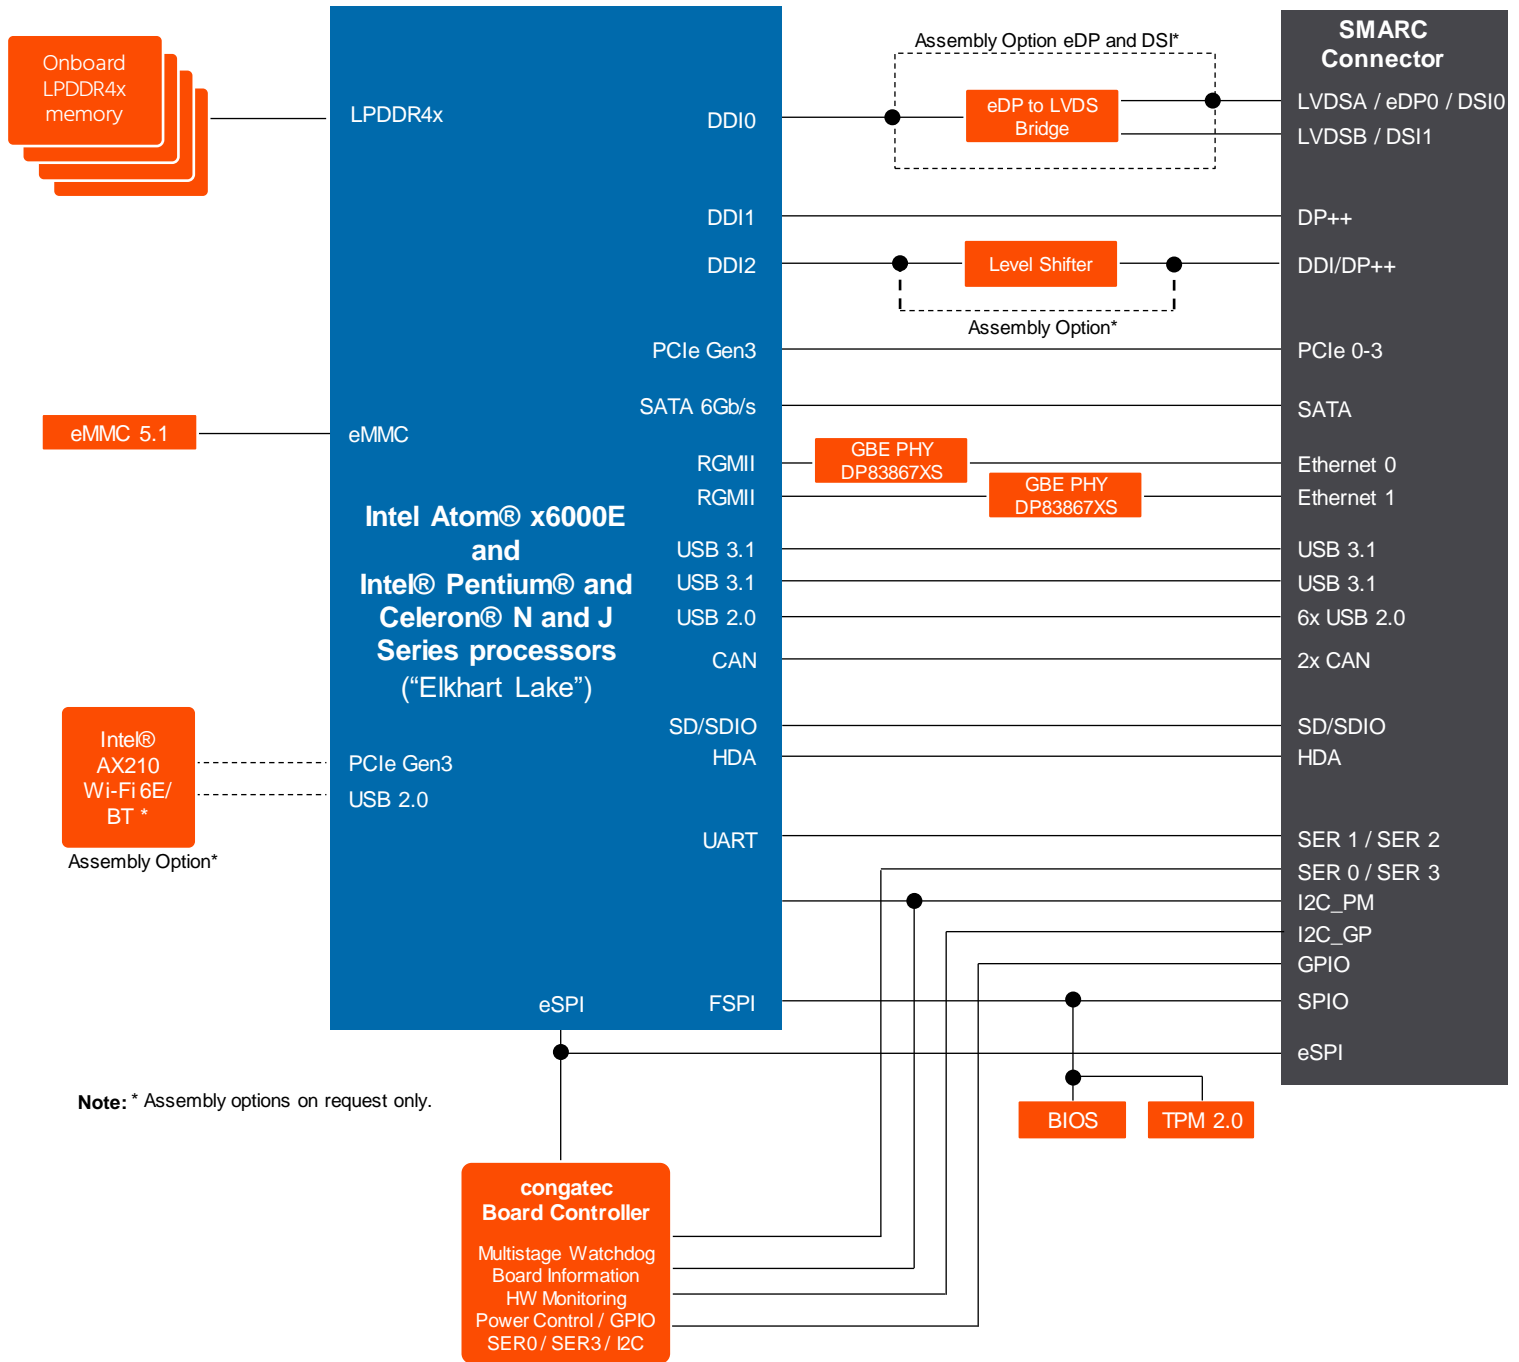

# conga-SA7 | Order Information

Article	PN	Description
conga-SA7/x6425E-16G eMMC64	050100	SMARC 2.1 module with Intel Atom® x6425E quad core processor with 2.0GHz core frequency up to 3.0GHz, 16GB 3200MT/s LPDDR4x onboard memory and 64GB eMMC 5.1 onboard flash.
conga-SA7/x6413E-8G eMMC32	050101	SMARC 2.1 module with Intel Atom® x6413E quad core processor with 1.5GHz core frequency up to 3.0GHz, 8GB 3.200MT/s LPDDR4x onboard memory and 32GB eMMC 5.1 onboard flash.
conga-SA7/x6211E-4G eMMC32	050102	SMARC 2.1 module with Intel Atom® x6211E dual core processor with 1.3GHz core frequency up to 3.0GHz, 4GB 3.200MT/s LPDDR4x onboard memory and 32GB eMMC 5.1 onboard flash.
conga-SA7/x6425E-8G eMMC32	050103	SMARC 2.1 module with Intel® Atom® x6425E quad core processor with 2.0GHz core frequency up to 3.0GHz, 15MB cache, 8GB 3733MT/s LPDDR4x onboard memory and 32GB eMMC onboard flash.
conga-SA7/x6425E-4G eMMC32	050104	SMARC 2.1 module with Intel® Atom® x6425E quad core processor with 2.0GHz core frequency up to 3.0GHz, 15MB cache, 4GB 3733MT/s LPDDR4x onboard memory and 32GB eMMC onboard flash.
conga-SA7/i-x6425RE-8G eMMC32	050110	SMARC 2.1 module with Intel Atom® x6425RE quad core processor with 1.9GHz core frequency, 8GB 4267MT/s LPDDR4x onboard memory and 32GB eMMC 5.1 onboard flash. Industrial grade temperature range from -40°C to 85°C.
conga-SA7/i-x6414RE-4G eMMC32	050111	SMARC 2.1 module with Intel Atom® x6414RE quad core processor with 1.5GHz core frequency, 4GB 3.200MT/s LPDDR4x onboard memory and 32GB eMMC 5.1 onboard flash. Industrial grade temperature range from -40°C to 85°C.
conga-SA7/i-x6212RE-4G eMMC32	050112	SMARC 2.1 module with Intel Atom® x6212RE dual core processor with 1.2GHz core frequency, 4GB 3.200MT/s LPDDR4x onboard memory and 32GB eMMC 5.1 onboard flash. Industrial grade temperature range from -40°C to 85°C.
conga-SA7/i-x6425RE-4G eMMC32	050113	SMARC 2.1 module with Intel® Atom® x6425RE quad core processor with 1.9GHz core frequency, 15MB cache, 4GB 3200MT/s LPDDR4x onboard memory and 32GB eMMC onboard flash. Industrial grade temperature range from -40°C to 85°C.
conga-SA7/i-x6425RE-8G eMMC32 AX210	050114	SMARC 2.1 module with Intel Atom® x6425RE quad core processor with 1.9GHz core frequency, 8GB 4267MT/s LPDDR4x onboard memory and 32GB eMMC 5.1 onboard flash. Intel® AX210 Wi-Fi 6E/BT. Industrial grade temperature range from -40°C to 85°C.
conga-SA7/J6426-16G eMMC64	050120	SMARC 2.1 module with Intel® Pentium® J6426 quad core processor with 2.0GHz core frequency up to 3.0GHz, 16GB 3200MT/s LPDDR4x onboard memory and 64GB eMMC 5.1 onboard flash.
conga-SA7/J6413-8G eMMC32	050121	SMARC 2.1 module with Intel® Celeron® J6413 quad core processor with 1.8GHz core frequency up to 3.0GHz, 8GB 3.733MT/s LPDDR4x onboard memory and 32GB eMMC 5.1 onboard flash.
conga-SA7/i-CSP-B	050150	Passive cooling solution for SMARC 2.1 module conga-SA7 with lidded Intel Atom® x6000E processor series. All standoffs are with 2.7mm bore hole.
conga-SA7/i-HSP-B	050151	Standard heatspreader for SMARC 2.1 module conga-SA7 with lidded Intel Atom® x6000E processor series. All standoffs are with 2.7mm bore hole.
conga-SA7/HSP-B	050152	Standard heatspreader for SMARC 2.1 module conga-SA7 with open-die Intel® Pentium® and Celeron® J and N processors. All standoffs are with 2.7mm bore hole.
conga-SA7/CSP-B	050153	Passive cooling solution for SMARC 2.1 module conga-SA7 with open-die Intel® Pentium® and Celeron® J and N processors. All standoffs are with 2.7mm bore hole.